


Instructions pour la configuration du réseau pour l'enregistreur de données (WiFi)

1. Ouvrez un réseau sans fil.

2. Sélectionnez le réseau de l'enregistreur (nom du réseau : AP+SN) et connectez-vous. Le mot de passe se trouve sur l'étiquette de l'enregistreur ; il s'agit des caractères qui se trouvent derrière PWD.

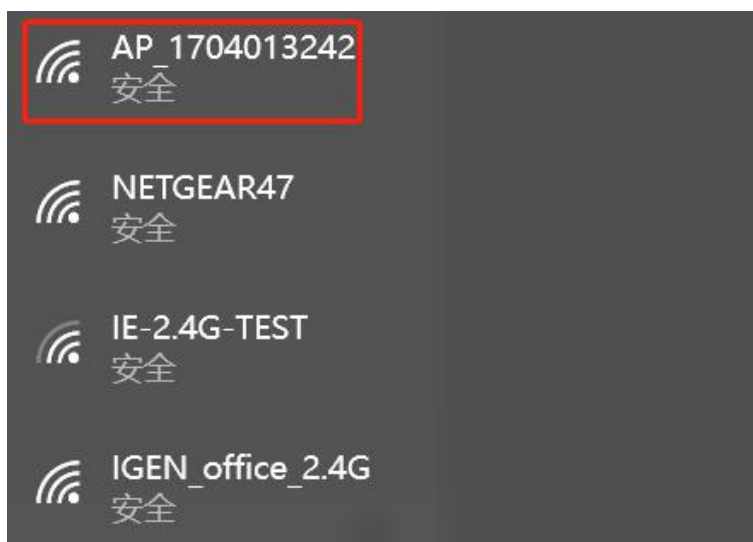

3. Ouvrez un navigateur et entrez 10.10.100.254. Le nom d'utilisateur et le mot de passe sont **admin**. (Navigateur recommandé : IE 8+, Chrome 15+, Firefox 10+.)



4. Aller à la page de configuration de l'enregistreur. Les informations de base sont listées ici.



中文 | English

Status

- Wizard
- Quick Set
- Advanced
- Upgrade
- Restart
- Reset

- Inverter information

Inverter serial number	---
Firmware version (main)	---
Firmware version (slave)	---
Inverter model	---
Rated power	--- W
Current power	--- W
Yield today	--- kWh
Total yield	--- kWh
Alerts	---
Last updated	---

- Device information

Device serial number	1704013242
Firmware version	LSW3_14_FFFF_1.0.23
Wireless AP mode	Enable
SSID	AP_1704013242
IP address	10.10.100.254
MAC address	9C:D8:63:71:8D:B0
Wireless STA mode	Disable
Router SSID	
Signal Quality	
IP address	
MAC address	

- Remote server information

Remote server A	Not connected
Remote server B	Not connected

Web Ver:1.0.24

Help

The device can be used as a wireless access point (AP mode) to facilitate users to configure the device, or it can also be used as a wireless information terminal (STA mode) to connect the remote server via wireless router.

Status of remote server

- Not connected: Connection to server failed last time. If under such status, please check the issues as follows: (1) check the device information to see whether IP address is obtained or not; (2) check if the router is connected to Internet or not; (3) check if a firewall is set on the router or not;
- Connected: Connection to server successful last time;
- Unknown: No connection to server. Please check again in 5 minutes.

5. Allez dans le guide de configuration, cliquez sur **Rafraîchir** pour rechercher le réseau sans fil. Sélectionnez le réseau cible et connectez-vous.

Status

- Wizard
- Quick Set
- Advanced
- Upgrade
- Restart
- Reset

Please select your current wireless network:

<input checked="" type="radio"/> IE-2.4G-TEST	54:A7:3:70:99:13	82	1
<input type="radio"/> AP_1753738492	0:BE:D5:20:B8:2C	80	1
<input type="radio"/> IGEN_office_2.4G	30:EA:E7:36:B:36	78	2
<input type="radio"/> IGENTEST	0:BE:D5:20:B8:2A	76	1
<input type="radio"/> IGEN_office_2.4G	E8:65:D4:F2:15:B8	74	6
<input type="radio"/> IGEN_office_2.4G	90:5D:7C:97:95:29	74	1
<input type="radio"/> IGEN_office_2.4G	90:5D:7C:97:95:27	72	1
<input type="radio"/> IGEN_office_2.4G	90:5D:7C:97:C9:E5	72	1
<input type="radio"/> AP_1719065936	30:EA:E7:36:CF:B2	70	1
<input type="radio"/> IGEN_office_2.4G	90:5D:7C:97:C9:E3	70	1
<input type="radio"/> TEST*** 2 = , ;	4A:E:EC:9E:C3:3E	70	11
<input type="radio"/> IGEN_office_2.4G	0:BE:D5:20:B7:EE	66	11
<input type="radio"/> AP_17075666	9C:D8:63:76:8A:24	66	11

*Note: When RSSI of the selected WiFi network is lower than 15%, the connection may be unstable, please select other available network or shorten the distance between the device and router.

Refresh

Add wireless network manually:

Network name (SSID) (Note: case sensitive)

Encryption method

Encryption algorithm

Next


1 2 3 4

Help


The setup wizard will assist you to complete the device setting within one minute.

6. Saisissez le mot de passe et cliquez sur **Suivant**.



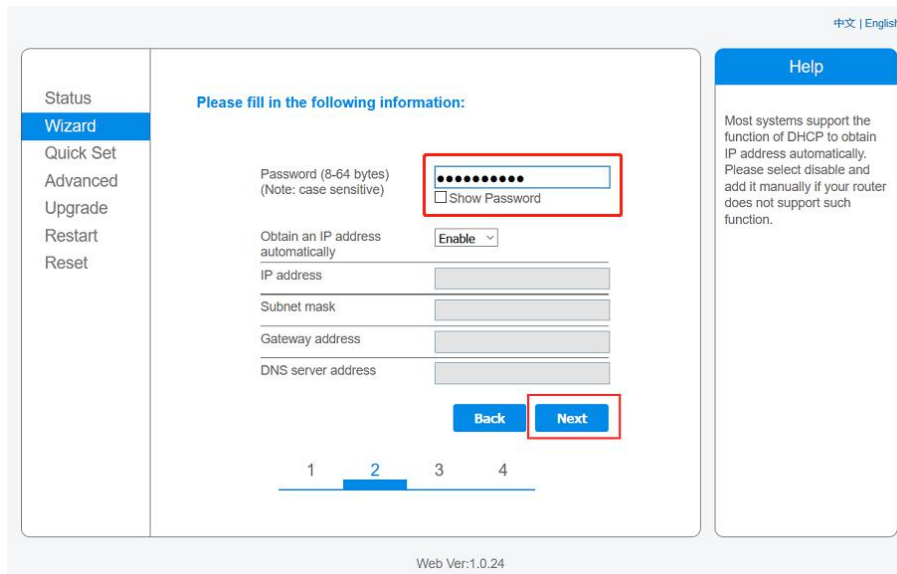


7. Les utilisateurs peuvent sélectionner les options ci-dessous pour renforcer la sécurité et cliquer sur **Suivant**.

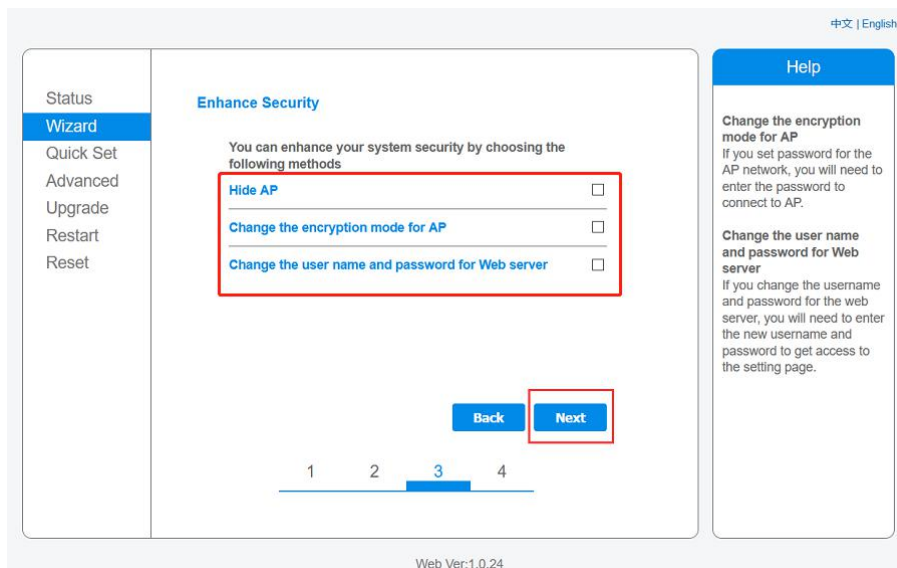


8. Si la configuration est réussie, la page suivante s'affiche et il faut cliquer sur OK pour redémarrer le module.



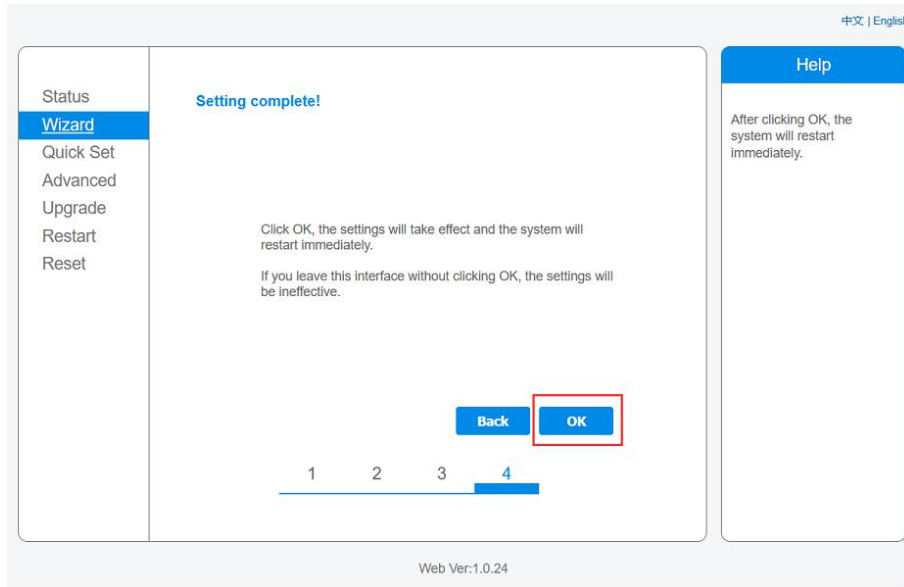

9. Connectez-vous à nouveau à 10.10.100.254 et vérifiez les informations système ici. Une fois la configuration du réseau terminée, le mode STA du réseau sans fil est activé. Les informations du routeur s'affichent sur la page et le serveur distant A est connectable.

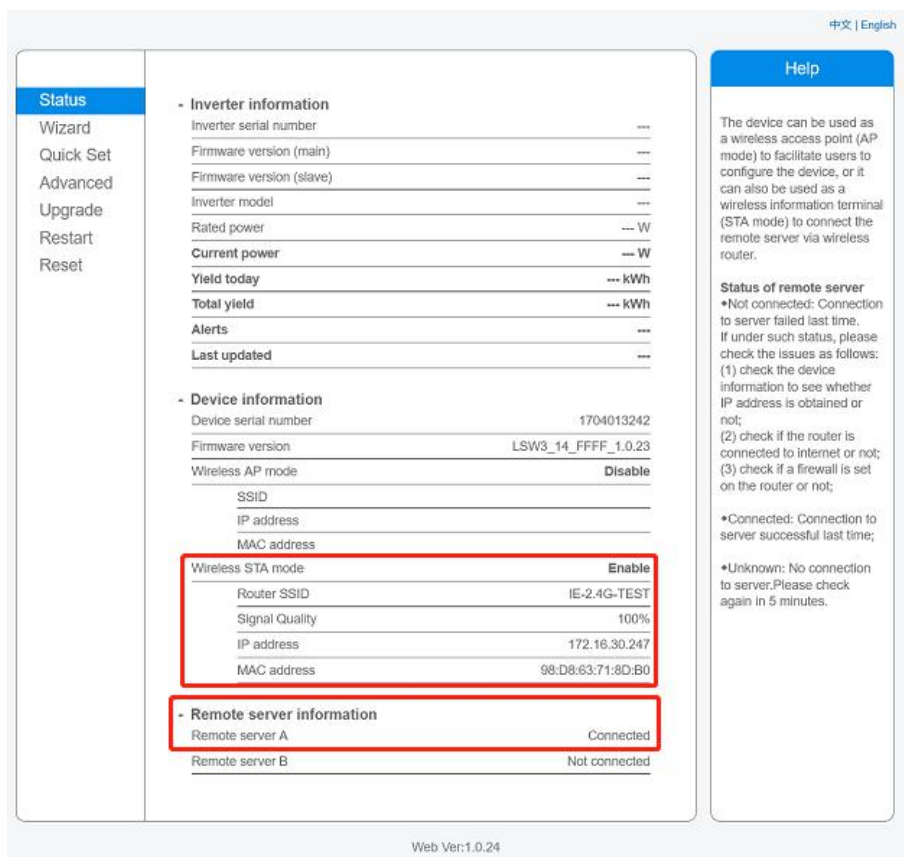

10. Si le serveur distant est déconnectable, veuillez rafraîchir la page ou réessayer.

